

Incubator

CO₂ Incubator

Features:

- * Water tank for humidity in the chamber.
- * Air jacket: equipped with UV Lamp for sterilizing;
Water jacket: equipped with HEPA filter.
- * Equipped with USB port and LCD touch screen, the incubator can save data in real time.
- * High quality CO₂ gas filter ensures the inside gas quality.
- * SMC brand gas circuit valves ensure more stable CO₂ concentration and less consumption of CO₂ gas.
- * Microcomputer controller, LCD displays temperature curve, CO₂ concentration, run-time and timing.
- * High quality infrared sensor for accurate CO₂ concentration.
- * The working chamber adopts round angle structure, easy to clean.



LCD touch screen



CO₂ gas filter



HEPA filter (for water jacket)


Technical Parameters:

Model	BJPX-C50	BJPX-C80	BJPX-C160		
Capacity	50L	80L	160L		
Heating	Air jacket	Air jacket	Water jacket	Air jacket	Water jacket
Temp. Range	RT+5~60°C				
Control Type	Microcomputer controller				
Temp. Fluctuation	≤ ±0.2°C (at 37°C)				
Temp. Uniformity	≤ ±0.3°C (at 37°C)				
Time Setting	999h or continuous				
Alarm	Audible and visual alarm; over-temperature alarm; CO ₂ Concentration alarm.				
Shelves	2 pcs/adjustable				
Material	External cold-rolled steel with painting; internal stainless steel				
Door	With inner door and external door				
CO ₂ Range	Infrared sensor, range 0~20%				
CO ₂ Control Resolution	0.1%				
Humidification Type	Water tank for natural evaporation				
Sterilization Type	UV lamp for air jacket				
Ambient Temp. & Humidity	18~30°C, suggest 25±2°C; relative humidity ≤80%				
Caster	Footmaster caster				
Consumption	350W	600W	875W	650W	1000W
Power Supply	AC110/220V±10%, 50/60Hz				
Internal Size (W*D*H)mm	368*387*408	398*446*498	380*450*590	498*546*678	498*480*722
External Size(W*D*H)mm	500*527*821	600*596*921	648*553*1057	795*835*1255	747*654*1260
Packing Size (W*D*H)mm	655*685*970	730*735*1070	795*835*1255	790*835*1255	877*784*1430
Gross Weight(kg)	110	138	158	168	198

CO₂ Incubator

Features:

- * Air jacket: with 90°C moist heat decontamination function.
- * Equipped with USB port and LCD touch screen, the incubator can save data in real time.
- * High quality infrared sensor for accurate CO₂ concentration.
- * The working chamber adopts round angle structure, easy to clean.
- * High quality CO₂ gas filter ensures the inside air quality.
- * SMC brand gas circuit valves ensure more stable CO₂ concentration and less consumption of CO₂ gas.
- * Push-pull shelves with holes ensures better temperature uniformity.
- * Microcomputer controller, LCD displays temperature curve, CO₂ concentration, run-time and timing.
- * Three Liters water reservoir in the bottom chamber ensures high humidity.

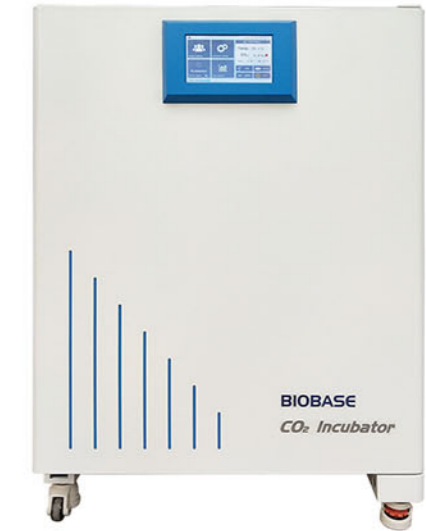

LCD touch screen



USB port



Push-pull shelves with holes

Technical Parameters:

Model	BJPX-C50II	BJPX-C80II	BJPX-C160II
Capacity	50L	80L	160L
Heating	Air jacket		
Temp. Range	RT+5~60°C		
Control Type	Temperature and humidity transmitter		
Temp. Fluctuation	≤ ±0.2°C(at 37°C)		
Temp. Uniformity	≤ ±0.3°C (at 37°C)		
Time Setting	999h or continuous		
Alarm	Audible and visual alarm; over-temperature alarm; CO ₂ concentration alarm.		
Shelves	2 pcs/adjustable		
Material	External cold-rolled steel with painting; internal stainless steel		
Door	With inner door and external door		
CO ₂ Range	Infrared sensor, range 0~20%;		
CO ₂ Control Resolution	0.1%		
Humidification Type	Water reservoir in the bottom chamber ensures high humidity(90%≤relative humidity≤99%)		
Sterilization Type	With 90°C moist heat decontamination function (95%≤humidity ≤99%RH)		
Ambient Temp. & Humidity	18~30°C, suggest 25±2°C; relative humidity ≤80%		
Caster	Footmaster caster		
Consumption	300W	650W	700W
Power Supply	AC110/220V±10%, 50/60Hz		
Internal Size (W*D*H)mm	338*392*442	398*452*497	548*552*588
External Size(W*D*H)mm	575*623*830	635*683*890	785*783*990
Packing Size (W*D*H)mm	665*713*1070	725*773*1130	875*873*1230
Gross Weight(kg)	85	108	147